



# 2.5M SINGLE START PROFILE TRIM

## COMPOSITE SLATTED CLADDING

Start your wall cladding project with Cladco capped composite single start profile trims, specially designed for installations using composite slatted cladding. These trims feature a durable composite core capped with a textured surface that replicates natural grain, and a hollow core design to perfectly match Cladco slatted cladding panels.

### COLOUR RANGE




### TRIM SPECIFICATIONS

SKU	(Walnut) WPCSLATSTARTW (Teak) WPCSLATSTARTT (Stone Grey) WPCSLATSTARTS (Coffee) WPCSLATSTARTC (Charcoal) WPCSLATSTARTB (Silver Grey) WPCSLATSTARTSG
Length	2.5m
Width (inc. Lip)	49mm
Thickness	26mm
Finish	Textured Grain
Weight	1.5kg


### TEST CERTIFICATIONS

FSC® Certification

SA-COC-005542

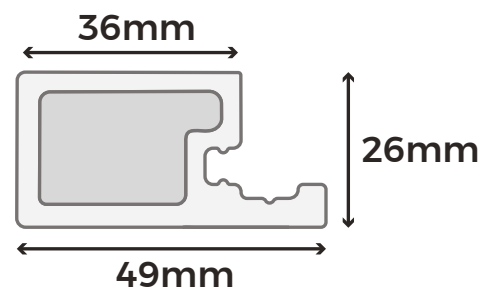

**Please Note:** Images are for illustration purposes only. Actual products may vary slightly from those shown.

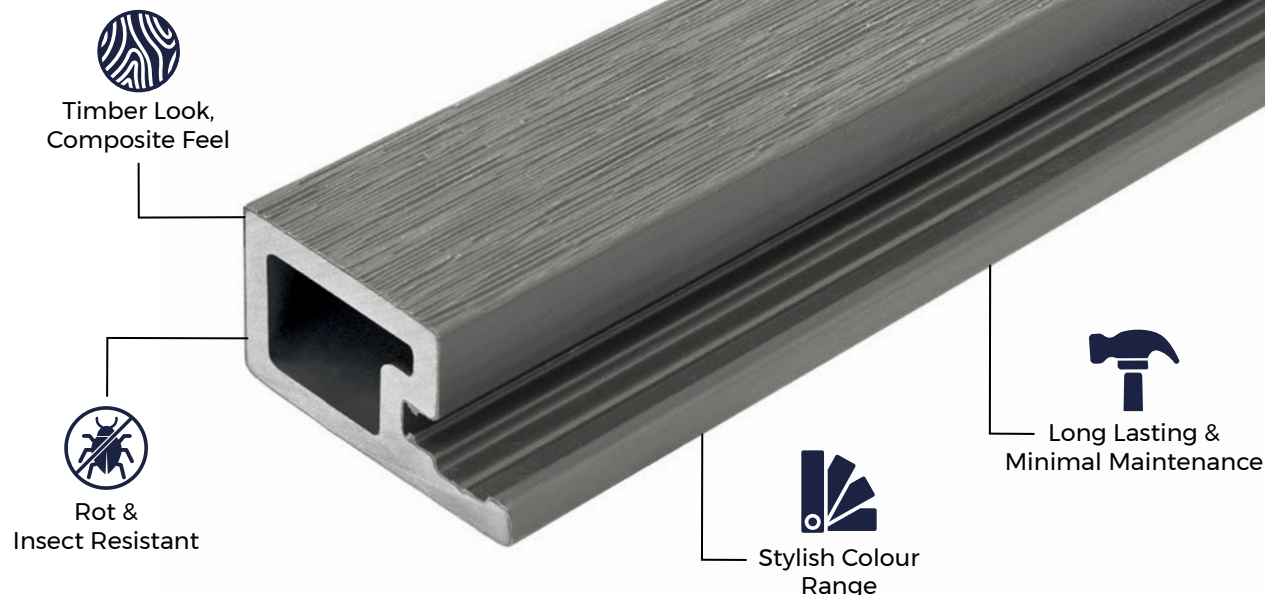

#### MATERIALS

Capped composite wood-plastic blend  
– Made from 60% hardwood fibres and 40% recycled plastics for a durable and sustainable finish.



#### SURFACES

Textured grain effect  
– Achieves the look of natural timber without the ongoing maintenance required for traditional wood cladding.



#### ACCESSORIES

Available accessories include composite slatted wall cladding panels, internal corner profile trim, external corner trim, corner trim and double end profile trims for a complete and seamless installation.



#### LOW MAINTENANCE

These trims feature a low-maintenance, rot-resistant construction, making them durable and easy to work with for a seamless cladding installation.



#### INSTALLATION

Start profile trims are installed along the side edges to start your slatted cladding project with a tongue-and-groove fitting.

## GENERAL CLEANING

For everyday debris such as leaves, berries, plants, and animal droppings, simply clear the surface with a brush. Regular maintenance is recommended to keep your cladding clean and in optimal condition.

To clean, mix a mild detergent with lukewarm water and gently remove dirt and buildup using a soft cloth or brush.

## NATURAL WEATHERING

Cladco composite wall cladding features an encapsulated, non-porous outer layer that protects against weathering, water, and UV damage.

Over time, some natural weathering may occur depending on the location and sunlight exposure. This is a normal part of the material's character and does not affect its long-term durability or performance.

## RECYCLED MATERIALS & SUSTAINABILITY

Cladco capped internal composite corner trims are manufactured using recycled materials, helping to reduce environmental impact. Each trim is made from 60% recycled hardwood fibres and 40% post-consumer recycled plastics, providing a low-maintenance and long-lasting solution.



To enhance durability, additional bonding agents are used to create a strong composite core, which is then capped with a hard-wearing outer layer for superior protection.

All Cladco composite products are available as FSC® certified at no additional cost. Please request FSC® certification when placing your order if required.

## SINGLE START PROFILE TRIM INSTALLATION ADVICE

Before installing slatted cladding panels, the single start profile trim must be securely fixed in place alongside the battens using 20mm screws.


Please note that single start profile trims can only be installed at one end of the wall due to their tongue-and-groove design. To ensure a consistent and seamless installation, it is important to take accurate measurements before purchasing, allowing for proper alignment of the tongue-and-groove sections throughout your wall cladding project.

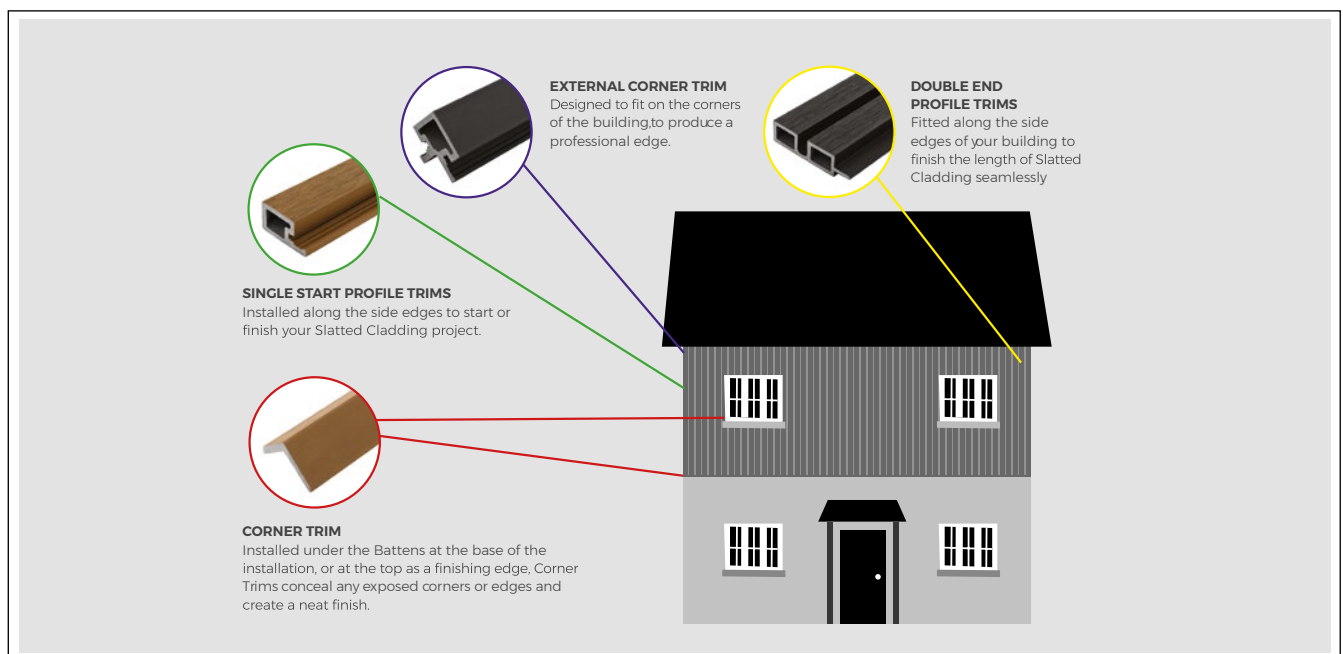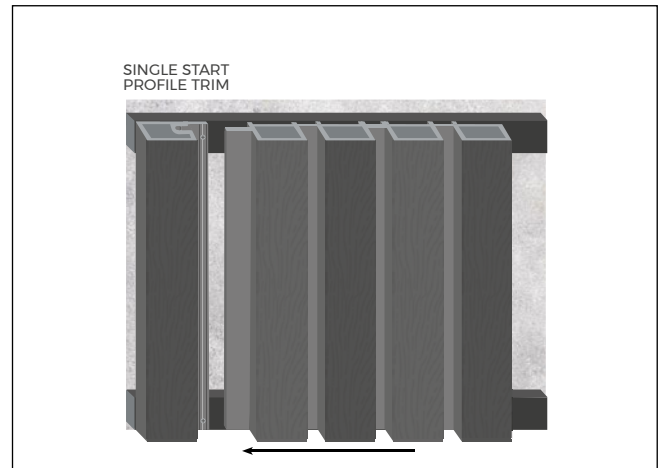

Adhering to these guidelines will ensure the proper installation and longevity of your slatted cladding project. Failure to follow these guidelines may void the product warranty.

For full installation details, please refer to our external slatted cladding installation guide.


## PRODUCT ACCESSORIES

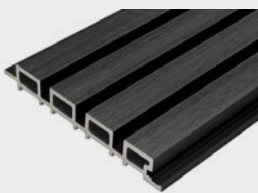


**2.5M COMPOSITE  
SLATTED CLADDING**




**EXTERNAL  
CORNER TRIM**



**DOUBLE  
END TRIM**



**INTERNAL  
CORNER TRIM**



**CORNER TRIM**



[www.cladco.co.uk](http://www.cladco.co.uk)  
T: 01837 659901 E: [info@cladco.co.uk](mailto:info@cladco.co.uk)

**CLADCO**  
PROFILES