

2.5M EXTERNAL CORNER TRIM

COMPOSITE SLATTED CLADDING



Capped composite external corner trims are designed to seamlessly continue your Cladco slatted wall cladding around exterior corners, providing a professional and cohesive finish.

Available in 2.5m lengths, these trims perfectly match the Cladco composite slatted panels, ensuring a consistent appearance throughout your installation.

Offering a durable, low-maintenance solution, they enhance both the longevity and aesthetics of your cladding project.

COLOUR RANGE




TRIM SPECIFICATIONS

or confidence	
SKU	(Walnut) WPCSLATECW (Teak) WPCSLATECT (Stone Grey) WPCSLATECS (Coffee) WPCSLATECC (Charcoal) WPCSLATECB (Silver Grey) WPCSLATECSG
Length	2.5m
Width (inc. Lip)	49mm
Thickness	26mm
Finish	Smooth
Weight	3kg

TEST CERTIFICATIONS

FSC® Certification


SA-COC-005542



Please Note: Images are for illustration purposes only. Actual products may vary slightly from those shown.





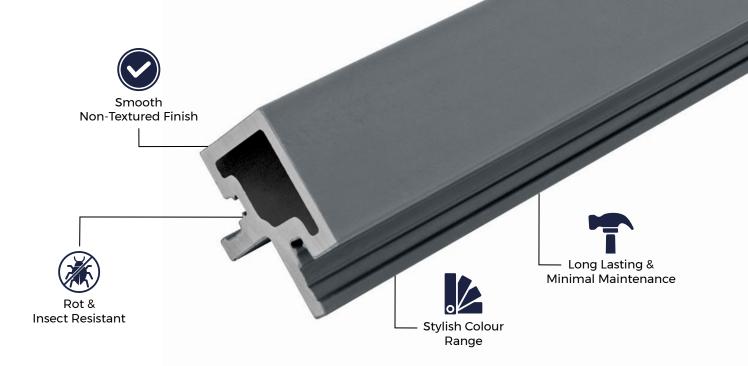



MATERIALS

Capped composite wood-plastic blend — made from 60% hardwood fibres and 40% recycled plastics, delivering a durable and sustainable finish.



SURFACES

The corner trims feature a plain, smooth surface, providing a clean and modern aesthetic.



ACCESSORIES

Available accessories include composite slatted wall cladding panels, internal corner profile trims, external corner trims, start profile trims, and double end profile trims—providing everything needed for a complete and seamless installation.



LOW MAINTENANCE

Corner trims feature a low-maintenance, rotresistant construction, making them durable and easy to install for a seamless cladding finish.



INSTALLATION

Installed alongside slatted cladding panels using a tongue-and-groove fitting, external corner trims provide a seamless and professional finish, making them easy to work with when fitting around corners.

GENERAL CLEANING

For everyday debris such as leaves, berries, plants, and animal droppings, simply clear the surface with a brush. Regular maintenance is recommended to keep your cladding clean and in optimal condition.

To clean, mix a mild detergent with lukewarm water and use a soft cloth or brush to gently remove dirt and buildup from the cladding panels.

NATURAL WEATHERING

Cladco composite wall cladding features an encapsulated, non-porous outer layer that protects against weathering, water, and UV damage.

Over time, some natural weathering may occur depending on location and sunlight exposure. This is a normal part of the material's character and does not affect its long-term durability or performance.

RECYCLED MATERIALS & SUSTAINABILITY

Cladco capped external composite corner trims are manufactured using recycled materials, helping to reduce environmental impact. Each trim is made from 60% recycled hardwood fibres and 40% post-consumer recycled plastics, delivering a low-maintenance and long-lasting solution.

To enhance durability, additional bonding agents create a strong composite core, which is then capped with a hard-wearing outer layer for superior protection.

All Cladco composite products are available as FSC® certified at no additional cost. Please request FSC® certification when placing your order if required.







EXTERNAL CORNER TRIM INSTALLATION ADVICE

The external corner trim is designed to fit seamlessly on building corners, providing a professional and polished edge to your slatted wall cladding installation.

When installing a slatted cladding panel next to an external corner trim, ensure a 5-7mm expansion gap between the panel and the trim corner. This allows the board to sit flush against the trim without disrupting the profile, ensuring a clean and secure fit.

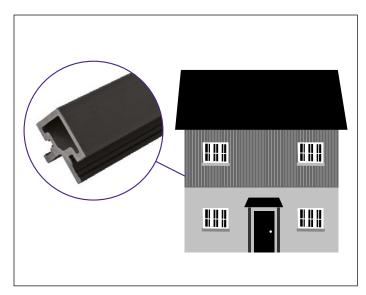

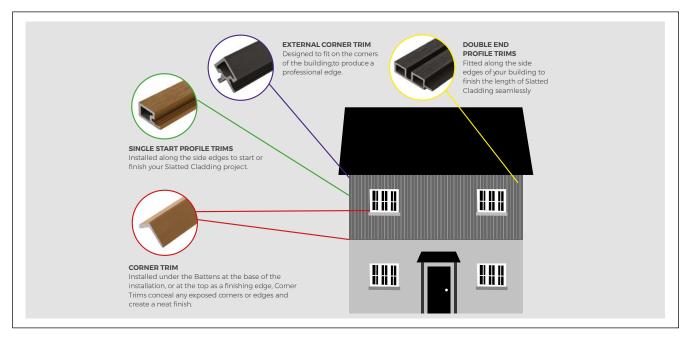

Adhering to these guidelines is essential to ensure the proper installation and longevity of your slatted cladding project. Failure to follow them may result in the product warranty being voided.

For full installation details, please refer to our external slatted cladding installation guide.

PRODUCT ACCESSORIES





