

3.6M WOODGRAIN EFFECT FASCIA BOARD NORDECK RANGE



Cladco Nordeck woodgrain effect fascia boards are used alongside Nordeck decking boards to hide the structural base, creating a seamless finish. Made with extremely resilient PVC-ASA materials providing resistance against fading, staining or scratching, fascia boards have a premium natural wood effect. Nordeck decking is available in six contemporary colours and benefits from a 20-year warranty.

*When installed with Cladco recycled plastic joists.

COLOUR RANGE




BOARD SPECIFICATIONS

Length	3.6m
Width	140mm
Thickness	15mm
Weight	5.08kg

TEST CERTIFICATIONS

Slip Resistance	DRY - Low-slip potential WET - Low-slip potential
SKU	(Chestnut) PVCFCN36 (Silver Birch) PVCFSB36 (Cedar Wood) PVCFCW36 (Walnut) PVCFCWN36 (Ash Grey) PVCFAG36 (Ebony) PVCFEB36 (Black) PVCFBL36

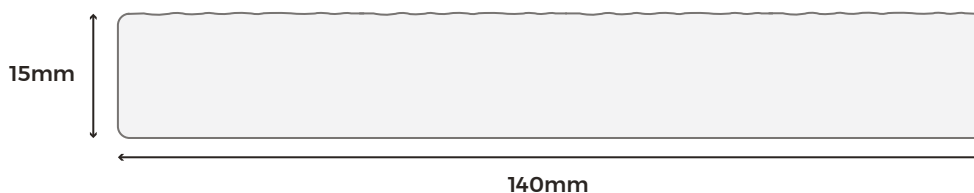

Please Note: Images are for illustration purposes only. Actual products may vary slightly from those shown.



MATERIALS

Made from a strong PVC core encased in a resilient ASA resin shell for durability.



SURFACES

Featuring a premium, embossed woodgrain effect surface to replicate timber.



ACCESSORIES

Install Nordeck fascia boards using either hidden deck fasteners or Cladco adhesive.



RESISTANCE

Unlike timber, Nordeck decking is resistant to stains, scratches, UV and moisture damage.



WARRANTY

Cladco Nordeck woodgrain effect fascia boards come with a 20-year warranty.

PVC-ASA MATERIAL

Cladco Nordeck woodgrain effect decking features a dense PVC core encased in a durable ASA resin shell, delivering exceptional resilience against weather, scratches, UV fading, and rot. This tough PVC-ASA capstock material is ideal for use in damp environments or near the ground, such as around pools or hot tubs, thanks to its moisture-resistant properties.

With a beautifully embossed surface, Nordeck decking replicates the natural look and feel of timber while offering superior resistance to everyday wear, stains, and scratches. Its outstanding UV resistance ensures it retains its original colour even after prolonged sun exposure.

AFTERCARE

Nordeck woodgrain effect decking is low maintenance and easy to clean using warm, soapy water when necessary. Occasional use of a pressure washer is possible but should be kept at least 250mm to 300mm away from the decking surface to prevent damage. Proper care will keep your Nordeck decking looking exceptional for years to come.

INSTALLATION ADVICE

Lay your Decking

Once the main decking structure is complete, you can install Cladco Nordeck bullnose boards to achieve a seamless, polished finish. These bullnose boards are fixed securely around the framework, providing a neat curved edge that enhances the overall look of your decking project.



Install using SPEEDDEKZ Deck Screws

Cladco Nordeck bullnose boards can be installed using SPEEDDEKZ deck screws for a secure fixing. Please note, this method will leave the screw heads visible on the surface of the boards, providing a strong and reliable attachment.


Install using Hidden Deck Fasteners

For a clean, hidden finish, install Cladco Nordeck woodgrain effect bullnose boards using our hidden deck fasteners. This system includes 65mm screws and colour-matched plugs that conceal the screw heads, creating a seamless and professional appearance.




For detailed information about installation, please read our Nordeck woodgrain effect decking installation guide.

PRODUCT ACCESSORIES

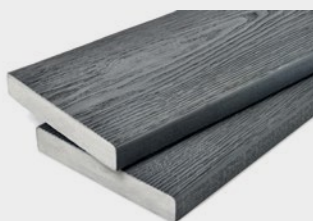

DECKING BOARDS

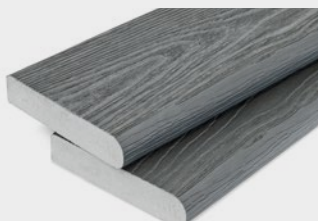

BULLNOSE BOARDS



CLADCO HIGH STRENGTH ADHESIVE



COMPOSITE JOISTS



TIMBER JOISTS



WEED MAT & PINS BUNDLE



SPEEDDEKZ 316
STAINLESS STEEL
SCREWS



MAGNETIC
PHILLIPS IMPACT
SCREWDRIVER BITS



65MM HIDDEN DECK
FASTENERS