

3.6M CAPPED COMPOSITE FASCIA TRIM PRORANGE



Cladco capped composite fascia boards provide the perfect finishing touch for your ProDeck or ProClad project. Featuring a durable protective shell, these boards offer excellent resistance to weathering and UV damage. They effectively seal gaps around your installation, preventing debris ingress and ensuring a clean, polished finish.

BURNT ONYX PLATINUM ROSEWOOD

QUARTZ

COLOUR RANGE

TRIM SPECIFICATIONS		
Length	3.6m	
Width	148mm	
Thick9mm	9mm	
We6.48kg (approx)	6.48kg (approx)	

SA-COC-005542T CERTIFICATIONS		
FSC® (Certification	SA-COC-005542
SKU	Burnt Oak Onyx Platinum Rosewood Sandstone Pewter Quartz	WPCEFTB36 WPCEFTO36 WPCEFTR36 WPCEFTS36 WPCEFTS36 WPCEFTPE36 WPCEFTQ36


148mm

Please Note: Images are for illustration purposes only. Actual products may vary slightly from those shown.







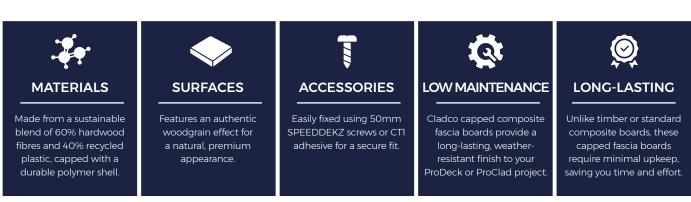

RECYCLED MATERIALS

Cladco capped composite fascia trims feature a core made from 100% recycled materials, comprising 60% recycled hardwood fibres and 40% recycled post-consumer plastics, helping to reduce environmental impact.

Our ProRange incorporates this composite core with a durable polymer protective shell, enhancing the board's resistance to weather, scratches, stains, and UV fading.

All Cladco composite products are available as FSC® Certified at no additional cost. If you require FSC® Certified products, please request them when placing your order. FSC® Certified products, please ask for these when placing your order.

AFTERCARE

Over time, capped composite fascia boards may collect dirt from outdoor exposure. For routine cleaning, simply brush away debris such as leaves, berries, and animal droppings.

For more stubborn grime, gently clean the boards with warm, soapy water to restore their appearance.



INSTALLATION ADVICE

Screws

Fix capped composite fascia boards to your ProDeck composite decking boards or joists using 50mm SPEEDDEKZ deck screws. Ensure screws are positioned at least 13mm from the edge of each fascia board.


Adhesive

A strong adhesive such as Cladco high strength adhesive can also be used to install capped composite fascia boards.

Screws and Adhesive

For optimal results, use a combination of screws and adhesive. Alternate between adhesive and screws every 150mm to achieve a secure and professional finish.







TEMPERATURE EXPANSION

The capped polymer shell on the composite core reduces the boards' susceptibility to temperature fluctuations, making ProClad boards highly resistant to expansion and contraction caused by heat and cold. This stability makes them an excellent choice for durable cladding.

Additionally, the polymer shell offers enhanced protection against weathering and provides improved insulation, helping to regulate indoor temperatures and lower heating and cooling costs.

For detailed information about installation, please read our ProClad composite or ProDeck composite installation guides


PRODUCT ACCESSORIES



CAPPED COMPOSITE CORNER TRIM



SPEEDDEKZ SCREWS



COMPOSITE BATTENS



CTI ADHESIVE



