



3.6M WOODGRAIN EFFECT DECKING BOARD NORDECK RANGE

Cladco Nordeck woodgrain effect decking boards are made with extremely resilient materials, providing resistance against fading, staining or scratching. Nordeck decking boards feature a luxurious texture replicating natural wood, and come in six contemporary colours. Nordeck decking boards benefit from a 20-year structural warranty and are composed of a solid PVC core encased in an ASA-resin shell for superior strength and durability.

*When installed with Cladco Recycled Plastic Joists.

COLOUR RANGE

CHESTNUT

SILVER BIRCH

CEDAR WOOD

WALNUT

ASH GREY

EBONY

BLACK

BOARD SPECIFICATIONS


Length	3.6m
Width	200mm
Thickness	32mm
Coverage	0.7m ²
Weight	18.2kg

TEST CERTIFICATIONS

Slip Resistance	DRY - Low-slip potential WET - Low-slip potential
SKU	(Chestnut) PVCDN36 (Silver Birch) PVCSB36 (Cedar Wood) PVCDW36 (Walnut) PVCDWN36 (Ash Grey) PVCDAG36 (Ebony) PVCDEB36 (Black) PVCDL36



Please Note: Images are for illustration purposes only. Actual products may vary slightly from those shown.

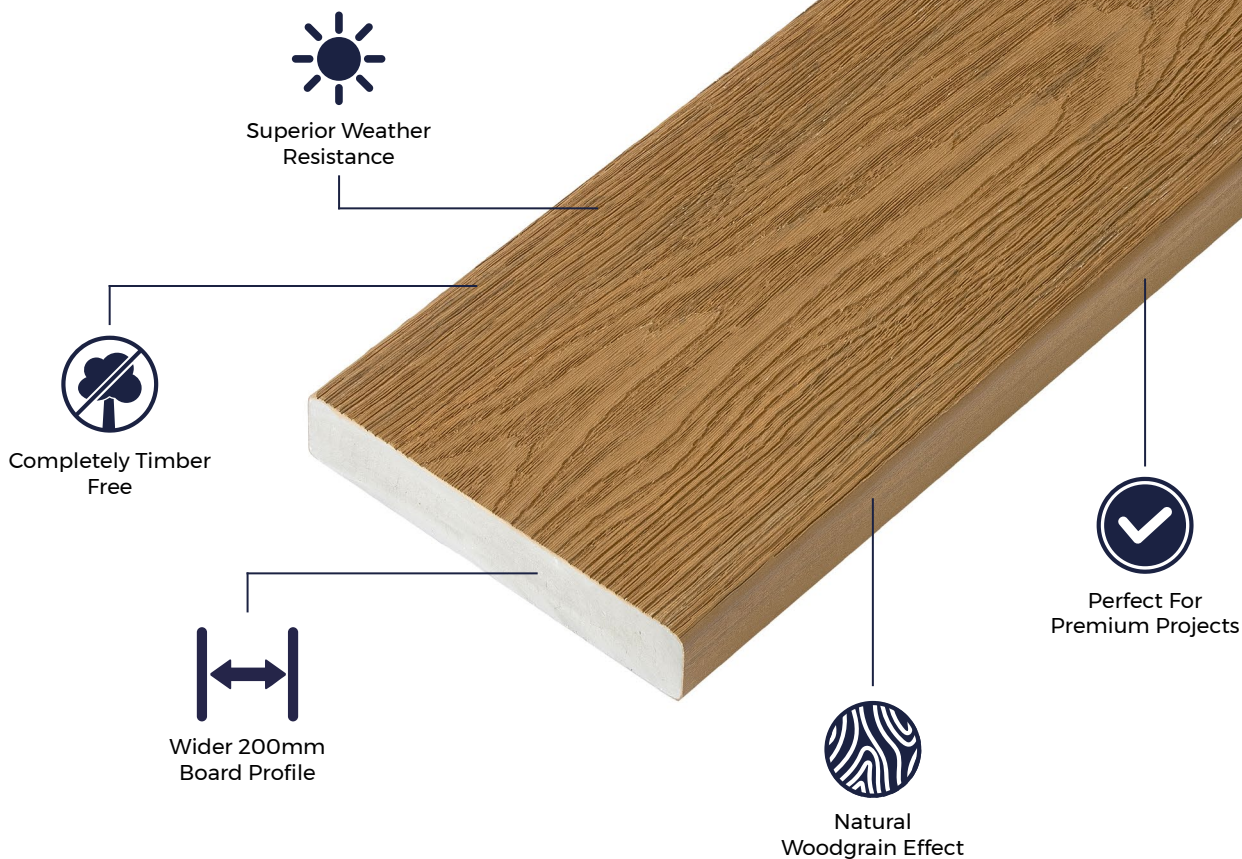

MATERIALS

Made from a strong PVC core encased in a resilient ASA resin shell for durability.



SURFACES

Featuring a premium, embossed woodgrain effect surface to replicate timber.



ACCESSORIES

Install Nordeck decking boards using either hidden deck fasteners or SPEEDDEKZ deck screws.



RESISTANCE

Unlike timber, Nordeck decking is resistant to stains, scratches, UV and moisture damage.



WARRANTY

Cladco Nordeck decking boards come with a 20-year warranty.

PVC-ASA MATERIAL

Cladco Nordeck woodgrain effect decking is composed of a dense PVC core encased in an ASA resin, providing superior resilience against weather, scratching, UV fading and rot damage.

The tough PVC-ASA capstock material is suitable for use low to the ground or in damp areas, such as around pools or hot tubs, due to its moisture resistant properties.

Nordeck woodgrain effect decking is highly resistant to general wear and tear, and also resists stains or scratches. Nordeck woodgrain effect decking has a remarkable natural wood effect look and feel due to its embossed surface. This type of decking is extremely UV resistant and maintains its original colour after sun exposure.

AFTERCARE

Cladco Nordeck woodgrain effect decking is low maintenance and easy to clean with soapy water when needed. Pressure washers can be used occasionally, keeping a distance of 250mm-300mm away from the surface. By following these methods, your Nordeck decking boards will look exceptional for years to come.

INSTALLATION ADVICE

Prepare your Base

Choose to lay Nordeck decking over a concrete base or a grass/soil base. The concrete base should have a slight slope of around 5mm for drainage. The grass/soil base should be even and debris free. Lay Cladco weed mat and cover with stones or chippings.




Framework

Prepare a framework for your decking using joists cut to your required length. To create a raised frame you will need to add blocks of timber. Allow a slight angle of 5mm for every metre to enable drainage. Set joists every 300mm and screw them into place from the outside of your frame, adding extra support with legs.




Lay your Decking

Lay out your decking onto the desired space, ensuring a 3mm gap between boards and obstructions. Secure the end board to the frame with hidden deck fasteners or SPEEDDEKZ decking screws. After installing all boards ensure they are lined up. Follow with Nordeck bullnose boards and fascia boards, if required.

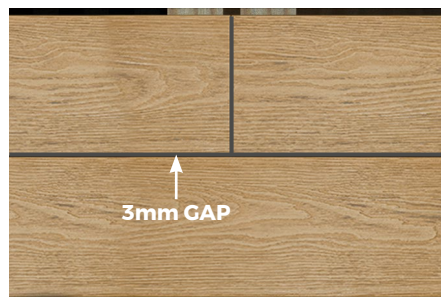

For detailed information about installation, please read our Nordeck woodgrain effect installation guide.

PRODUCT ACCESSORIES

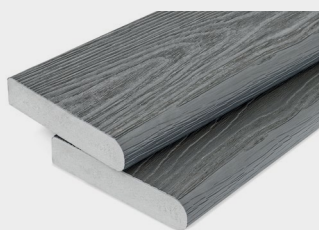

BULLNOSE BOARDS



FASCIA BOARDS



CLADCO HIGH STRENGTH ADHESIVE



COMPOSITE JOISTS



TIMBER JOISTS



WEED MAT & PINS BUNDLE



SPEEDDEKZ 316 STAINLESS STEEL SCREWS



MAGNETIC PHILLIPS IMPACT SCREWDRIVER BITS



65MM HIDDEN DECK FASTENERS